



MINOR STREET

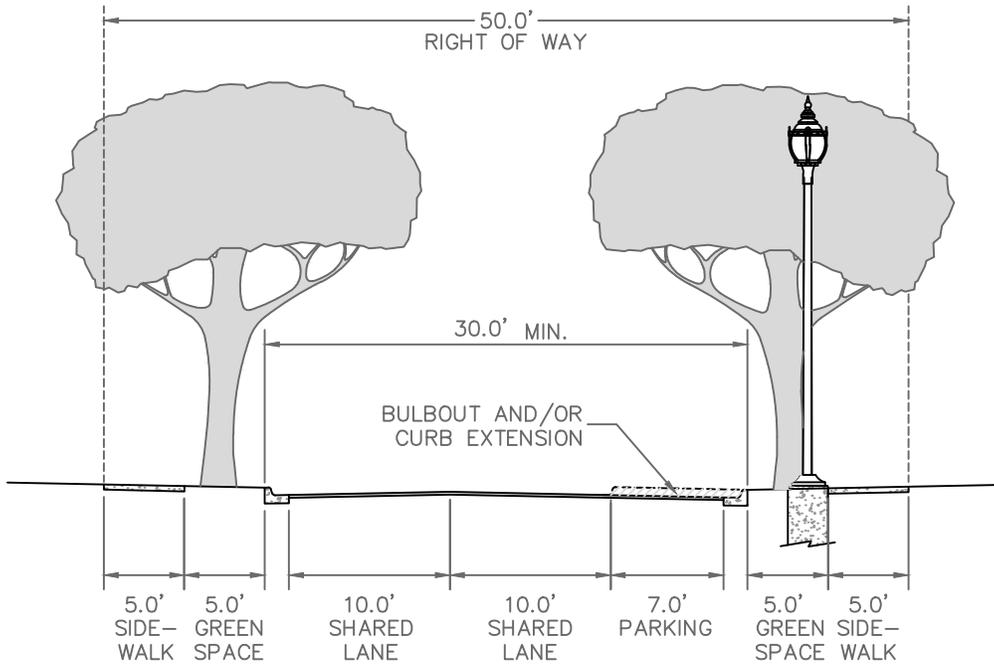

*ROAD CENTERLINE DOES NOT MATCH CENTERLINE OF RIGHT OF WAY.

- OR -

- STANDARD HEIGHT TO THE STREET LIGHT HEAD SHALL BE 15 FEET (TYP).
- STREET LIGHTS SHALL BE PELCO POST TOP LUMINAIRE POLES WITH BRISTOL SERIES, DARK SKY LED LUMINAIRES, HOLOPHANE WASHINGTON UTILITY LED LUMINAIRE WITH FLUTED POSTS AND HAMILTON BASES, OR STAFF APPROVED EQUAL, SPACED A MAXIMUM OF 200 FEET AND AT INTERSECTIONS. POLES AND LUMINAIRES SHALL BE POWDER COATED BRONZE FEDERAL STANDARD COLOR 20062. DIRECT BURIAL POLES NOT ALLOWED. SEE WEBSITE FOR DETAILED SPECIFICATIONS.
- PAVING SECTION SHALL BE A MINIMUM OF 3-INCH HOT MIX ASPHALT AND 6-INCHES OF CLASS 7 AGGREGATE BASE (TO 1' BEYOND CURB) ON A STABLE SUBGRADE.
- INCORPORATE BULBOUTS AND CURB EXTENSIONS AT INTERSECTIONS.
- SEE SHEET 6 OF THE TYPICAL STREET SECTIONS FOR TREE SPACING. DO NOT PLACE TREES WITHIN 20' OF STREET LIGHTS. TREES SHALL BE CENTERED IN THE GREENSPACE.
- ALL CURB IS 1.5' WIDE.
- RAMP DRIVEWAYS UP TO SIDEWALK.

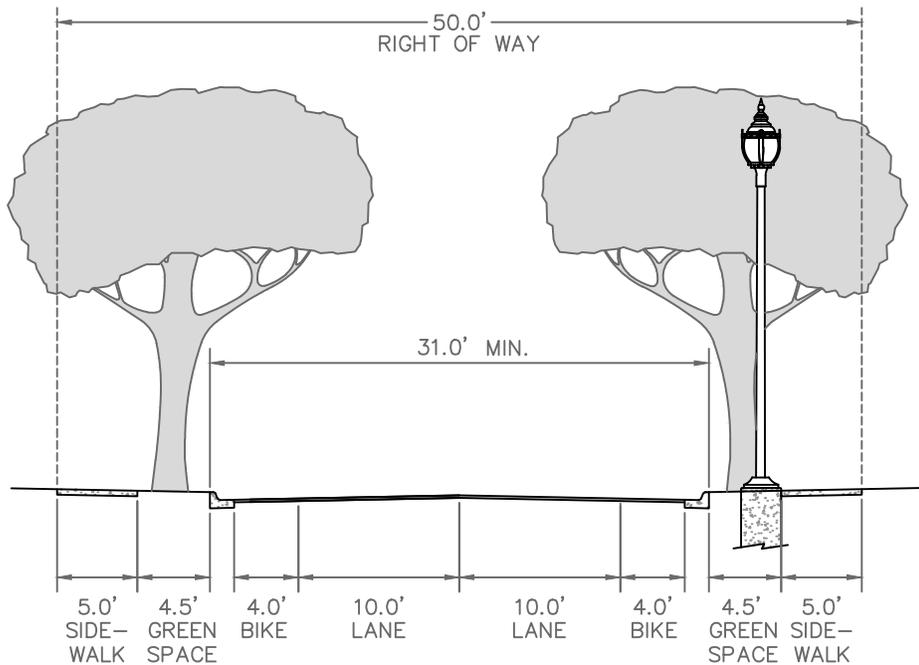

25 MPH
50' ROW



CITY OF ROGERS

301 WEST CHESTNUT STREET
ROGERS, ARKANSAS 72756
(479) 621-1186

TYPICAL STREET SECTIONS

4 OF 6

NOT TO SCALE

OCTOBER 12, 2016